


GEHL

4640E
Skid Loader



4640E

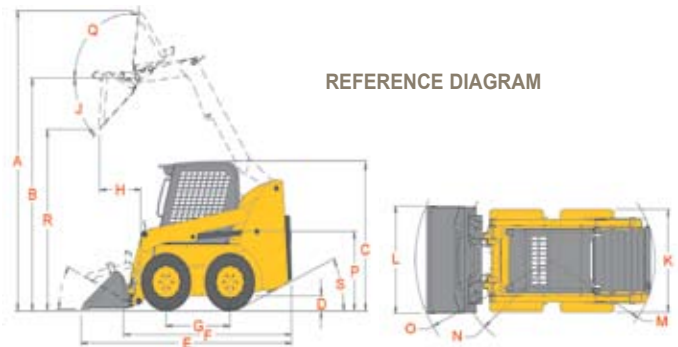

DIMENSIONS

A. Overall Operating Height (mm)	149" (3785)
B. Height to Hinge Pin (fully raised) (mm)	115.5" (2934)
C. Overall Height (to top of ROPS) (mm)	78.0" (1981)
D. Ground Clearance to Chassis (mm)	7.5" (158)
E. Overall Length w/66" Bucket (mm)	122.8" (3119)
F. Overall Length w/o Bucket (mm)	89.8" (2281)
G. Wheelbase (mm)	37.5" (953)
H. Bucket Dump Reach (at full height) (mm)	27.6" (701)
I. Bucket Rollback at Ground	27°
J. Dump Angle	40°
K. Overall Width - Standard (mm)	63.5" (1613)
With Optional Offset Tire/Rim (mm)	59.7" (1516)
L. Bucket Widths (mm)	61.5" - 70" (1562 - 1778)
M. Clearance Circle (rear) (mm)	59.5" (1513)
N. Clearance Circle (front, w/o bucket) (mm)	45" (1143)
O. Clearance Circle (front, w/ bucket) (mm)	74.5" (1892)
P. Seat to Ground Height (mm)	37.5" (953)
Q. Bucket Rollback at Full Height	96°
R. Dump Height (mm)	89.5" (2273)
S. Departure Angle	23°
Standard Tire Size	10.00 x 16.5 HD
Optional Offset Tire/Rim Size	10.00 x 16.5 HD Narrow Offset Rim

ENGINE

Make/Model	Deutz / TD2009 Series
Type	Water-cooled, Turbo-diesel, Tier III-certified
Net Power (kW) @ rpm (turbocharged)	62 hp (47) @ 2500
Maximum Torque (Nm) @ rpm	148 ft.-lbs. (200) @ 1600

HYDRAULIC SYSTEM

Auxiliary Hydraulics - Standard (L/min)	19 gpm (72)
High-Flow Option (L/min)	30 gpm (114)
Filtration	3 micron
Reservoir Capacity (L)	12 gal. (45)

CAPACITIES/WEIGHTS

Rated Operating Load ⁽¹⁾ (kg)	1,650 lbs. (748)
Tipping Capacity (kg)	3,300 lbs. (1497)
Operating Weight ⁽²⁾ (kg) approx.	6,425 lbs. (2914)

(1) Per SAE J818, SAE J732, and ISO 14397

(2) Unit weight with standard bucket, 175 lb. (79 kg) operator, and full fuel tank.

Gehl reserves the right to add improvements or make changes in specifications at any time without notice or obligation.

SAFETY IS NO ACCIDENT.

Gehl Company reminds users to read and understand the operator's manual before operating any piece of equipment. Additionally, make sure all safety devices and shields are in place and functioning properly.

Gehl proves once again that great machines can come in small packages. The New 4640E Skid Loader has one of the most compact frames on the market. Equipped with a 61.5" bucket, the 4640E can easily clear narrow spaces such as doorways, gates and sidewalks.

- New, narrow chassis with optional 61.5" bucket works well in tight, confined areas without sacrificing operator comfort
- 62-hp Deutz TD2009 Series water-cooled turbo-diesel Tier III engine supplies extra power when you need it and provides smooth, quiet operation
- Improved high-capacity combination radiator and oil cooler for optimum cooling
- Hydraloc™ automatic interlock system increases operator safety by locking lift, tilt and drive systems when the operator leaves the seat, raises the restraint bar or turns off the ignition switch
- High-flow auxiliary hydraulics option includes "soft-start" and detent features for smooth and controlled attachment operation

GEHL

COMPACT EQUIPMENT FOR BIG RESULTS™

gehl.com

143 Water Street
West Bend, WI 53095
U.S.A.

Tel: 262-334-9461
Fax: 262-338-7517